



Centratori di Barre Serie C1-G

C1-G Bar Centering Units

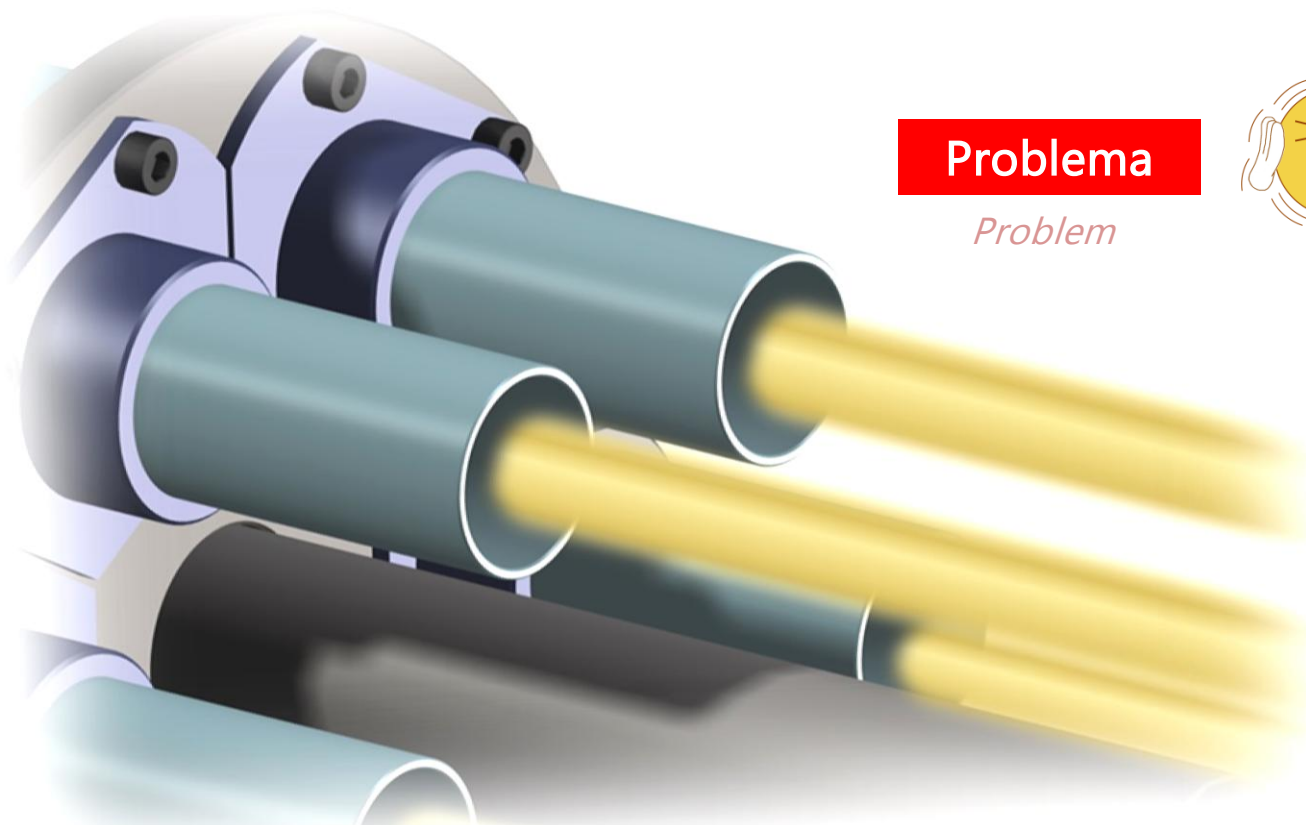

Problema

Problem

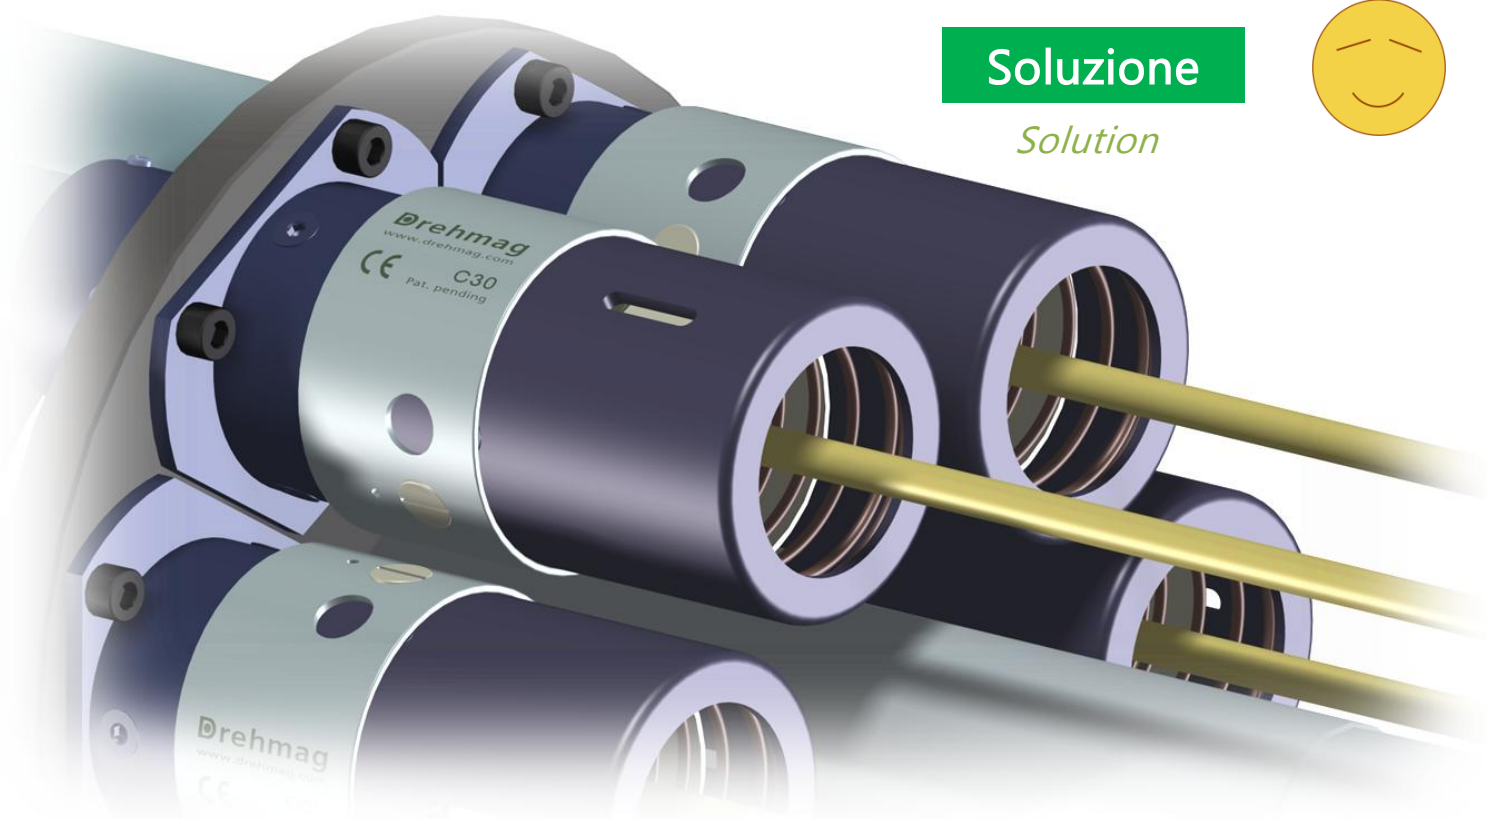


Soluzione

Solution



Centratore C1-G

C1-G Centering Unit


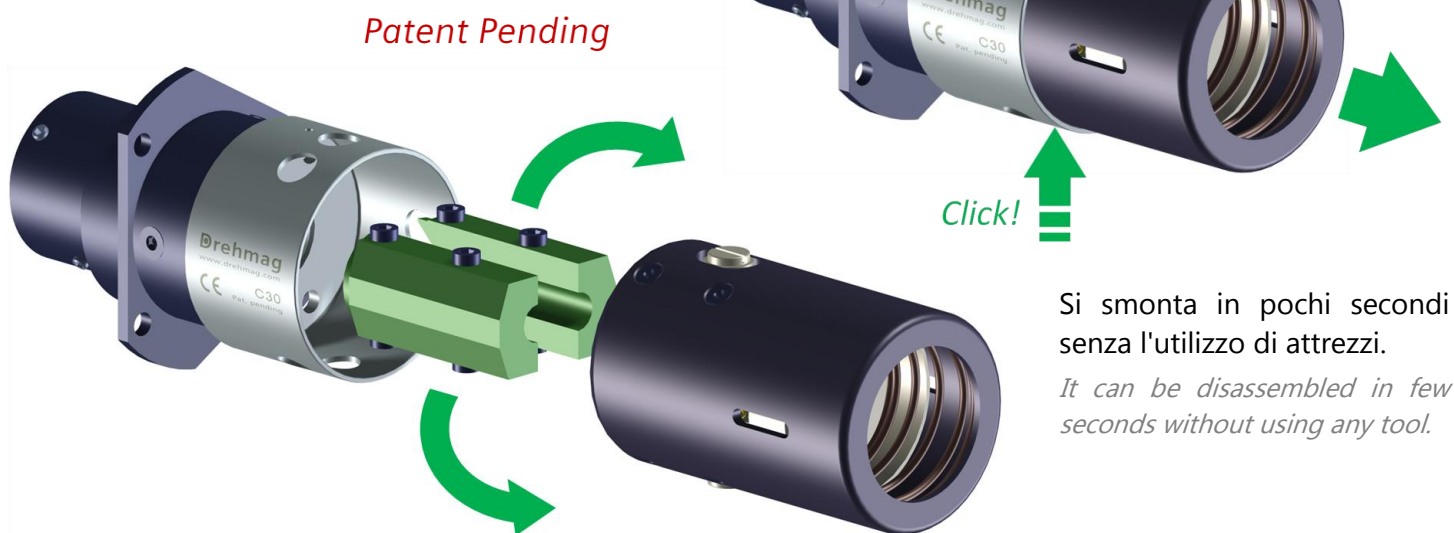


La Serie C1-G è progettata per la centratura di barre di sezione medio-piccola rispetto alla capacità del tornio. Il centratore si può montare in pochi minuti su tutti i tipi di tornio con caricatore, purché vi sia lo spazio sufficiente per installarlo. All'interno del centratore una coppia di ganasce guida perfettamente la barra, impedendole di oscillare e garantendo una lavorazione silenziosa e senza vibrazioni. All'arrivo dello spingibarra le ganasce si aprono automaticamente senza azionamenti esterni.

The C1-G Line is designed to centre bars of small-medium section in comparison to the lathe maximum bar size. The Centering Unit can be easily set in a couple of minutes on any kind of lathe fed by a loader, provided that there is enough room to install it. Two plastic jaws inside the Centering Unit perfectly guide the bar, preventing it from swinging and granting a working process with extremely low noise and vibration. When the bar pusher comes close, the jaws open up automatically.

Le ganasce sono in materiale plastico ultrasensibile e non danneggiano la superficie della barra.
(Disponibili per vari tipi di sezione)

The high-resistant plastic jaws do not damage the bar surface. (Available for different types of bar section)

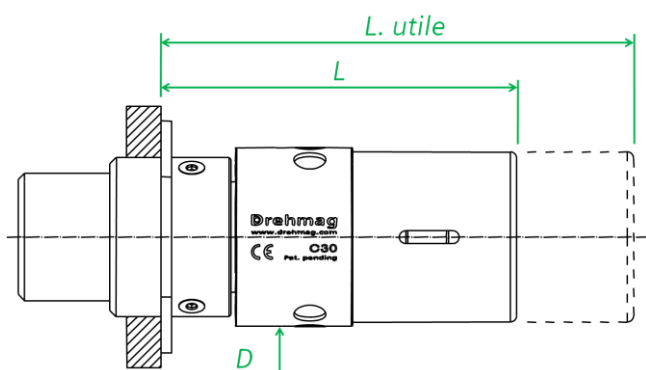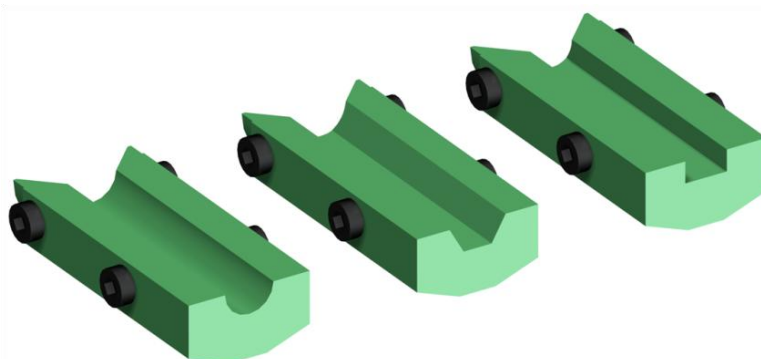

Modello	Ø Min Max	D	L	L. utile
C1-G20	5-15	67	141	183
C1-G24	5-18	72	149	199
C1-G30	6-20	84	162	217
C1-G40	8-30	102	214	276
C1-G52	10-35	125	229	299